



35Z3

# 35Z3 HALF-WAVE VACUUM RECTIFIER

## GENERAL DATA

### Electrical:


Heater, for Unipotential Cathode:

Voltage. . . . . 35 . . . . . ac or dc volts  
Current. . . . . 0.15 . . . . . amp

### Mechanical:


Mounting Position. . . . . Any  
Maximum Overall Length. . . . . 3-5/32"  
Maximum Seated Length. . . . . 2-5/8"  
Maximum Diameter. . . . . 1-3/16"  
Bulb. . . . . T-9  
Base. . . . . Lock-in 8-Pin  
Basing Designation for BOTTOM VIEW. . . . . 4Z

Pin 1 - Heater  
Pin 2 - Plate  
Pin 3 - No  
Connection  
Pin 4 - No  
Connection  
Pin 5 - No  
Connection



Pin 6 - No  
Connection  
Pin 7 - Cathode  
Pin 8 - Heater  
Plug - Base  
Shell

Maximum Ratings and Typical Operating Conditions for the  
35Z3 are the same as for Type 35Z4-GT.

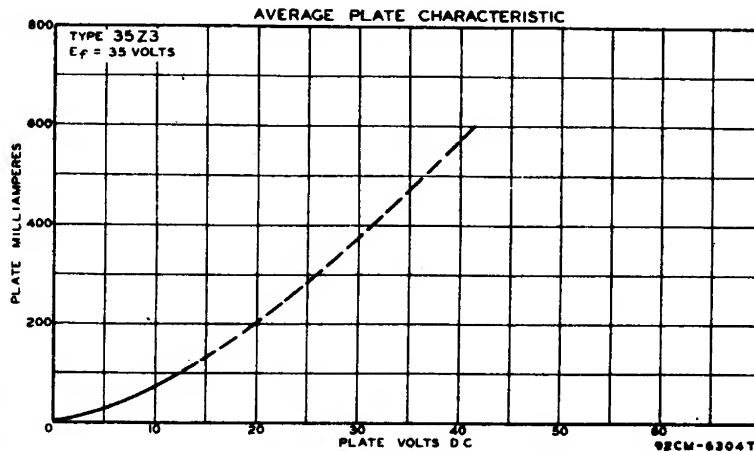

JUNE 20, 1947

TUBE DEPARTMENT  
RADIO CORPORATION OF AMERICA, HARRISON, NEW JERSEY

DATA